

AD-A255 497



12

OFFICE OF NAVAL RESEARCH

Contract N00014-91-J-1513

TECHNICAL REPORT NO. 2

A Simple Controller for Repetitive Cycles in Atomic Layer Epitaxy

by

D. Kinosky, A. Mahajan, R. Qian, S. Thomas, S. Banerjee, and A. Tasch

Department of Electrical and Computer Engineering


University of Texas at Austin

Austin, TX 78712

Proceedings of the Second International Symposium on
Atomic Layer Epitaxy, June 3-5, 1992, Raleigh, NC

Reproduction in whole or in part is permitted for any
purpose of the United States Government

This document had been approved for public release and sale;
its distribution is unlimited.

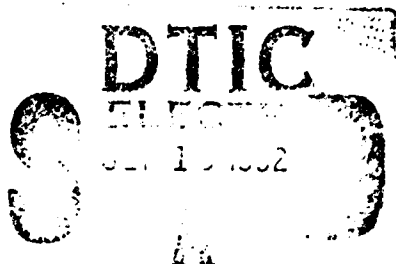

92 9 14 107

401997

DEFENSE TECHNICAL INFORMATION CENTER



9225213

3 pgs

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 3, 1992	3. REPORT TYPE AND DATES COVERED Preprint	
4. TITLE AND SUBTITLE A Simple Controller for Repetitive Cycles in Atomic Layer Epitaxy			5. FUNDING NUMBERS Grant No. N00014-91-J-1513	
6. AUTHOR(S) D. Kinosky, A. Mahajan, R. Qian, S. Thomas, S. Banerjee, and A. Tasch				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Microelectronics Research Center ECE Dept., 433 ENS University of Texas at Austin Austin, TX 78712			8. PERFORMING ORGANIZATION REPORT NUMBER 2	
9. SPONSORING MONITORING AGENCY NAME(S) AND ADDRESS(ES) Department of the Navy Office of the Chief of Naval Research 800 North Quincy Street, Code 1511: SJH Arlington, Virginia 22217-5000			10. SPONSORING / MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT <p>A simple controller system has been designed and added to an existing deposition system in order to implement deposition of silicon by Atomic Layer Epitaxy (ALE). A Remote Plasma-enhanced Chemical Vapor Deposition (RPCVD) system has been modified for automatic control of repetitive cycles of disilane dosing and hydrogen desorption via low energy ion bombardment. The simple configuration of the input/output modules and ease of programming allowed efficient debugging of the installation and a large degree of flexibility in <i>in situ</i> cleaning and in both ALE and CVD experiments.</p>				
14. SUBJECT TERMS System controller Atomic Layer Epitaxy			15. NUMBER OF PAGES 2	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	

A Simple Controller for Repetitive Cycles in Atomic Layer Epitaxy
D.Kinosky, A.Mahajan, J.Irby, R.Qian, S.Thomas, S.Banerjee and A.Tasch
Electrical & Computer Engineering, University of Texas, Austin TX 78712

FAX: (512)-471-8575

A simple controller system has been designed and added to an existing deposition system in order to implement deposition of silicon by Atomic Layer Epitaxy (ALE). A Remote Plasma-enhanced Chemical Vapor Deposition (RPCVD) system has been modified for automatic control of repetitive cycles of disilane dosing and hydrogen desorption via low energy ion bombardment. A commercially available controller made by Tymkon, Integrated Time Systems, was configured for the RPCVD system with 32 digital and 8 analog outputs and 8 digital and 8 analog inputs. The digital outputs drive (Single Pole Double Throw) SPDT relays which are used to switch the output of an external 24 VDC power supply connected to solenoid-actuated valves in the gas lines in order to control the mass flow controllers (MFC's), and to switch the r-f power for the remote plasma in sequential operations. The r-f power supply is enabled via a 5V TTL input which is supplied from a separate external supply. The analog outputs set MFC flow rates of disilane and other silicon precursors as well as germane and the dopant gases, phosphine and diborane. Inputs are used as interlocks to monitor deviation of actual gas flow rates from set point values, valve positions, and condition of the r-f plasma and the DC power supplies. Conditional branching and alarm conditions are programmed as a function of the input channels. The addition of a custom EPROM allows the number of ALE cycles in a process loop to be specified. A typical experiment comprises 100 cycles of disilane dosing and H-desorption, each cycle having 5 steps and lasting 3.5 minutes per cycle. Prior to the start of an ALE experiment, the Si (100) wafer is cleaned *in situ* by a remote H-plasma which leaves a (3x1) H-terminated Si surface. The first step of a typical cycle is the creation of adsorption sites for Si bearing species by desorption of hydrogen from the H-passivated surface. Helium flow is established through the plasma column and the r-f plasma power is enabled to strike the remote plasma. Hydrogen is desorbed by bombardment with low energy He ions resulting in conversion of the (3x1) surface to a (2x1) reconstruction. The range of bombardment times studied was 1-4 min. The H-desorption step is followed by Si₂H₆ dosing over a range of partial pressures (10⁻⁷ Torr to 1.67 mTorr) and times (20 s to 3 min.) without plasma excitation. It is believed that Si₂H₆ chemisorbs on a bare Si surface as 2 silyl(SiH₃) species, re-passivating the surface with H termination. The Si₂H₆ dosing pressures and times corresponded to saturation dosing (~10⁷ Langmuirs). Following dosing, a 30 s pause was programmed before switching on the plasma and commencing the next cycle to allow for complete depletion of disilane from the system. The temperatures that were investigated were in the range of 250°C-400°C. Installation of a commercially available controller has allowed rapid conversion of an existing deposition system to automatic control. The simple configuration of the input/output modules and ease of programming allowed efficient debugging of the installation and a large degree of flexibility in *in situ* cleaning and in both ALE and CVD experiments.

DTIC QUALITY INSPECTED 3

Accession For
NTIS CRAB
DTIC TAB
Unannounced
Justification
By
Distribution
DAI
A-1